




SLR®

CANCAMO GIRATORIO CON ESLABON



SLR303

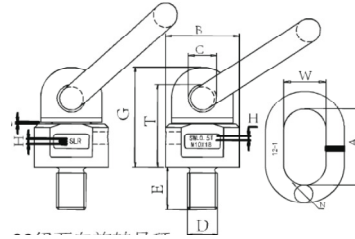

SLR303 G80 CANCAMO GIRATORIO CON ESLABON

ITEM NO.	WEIGHT/Kg	WLL/T (4:1)		DxE	B	C	G	T	A	W	N	H	S
		90°	0°										
8-SLR303-M8	0.41	0.3	0.6	M8X13	36	16.5	51	41	55	30	14	3	1
8-SLR303-M10	0.43	0.45	0.9	M10X18	36	16.5	51	41	55	30	14	3	1
8-SLR303-M10X90	0.38	0.5	1.0	M10X90	36	16.5	51	41	55	30	14	3	1
8-SLR303-M12	0.44	0.5	1.0	M12X18	36	16.5	51	41	55	30	14	3	1
8-SLR303-M12X40	0.32	0.45	1.0	M12X40	36	16.5	51	41	55	30	14	3	1
8-SLR303-M12X45	0.47	0.5	1.0	M12X45	36	16.5	51	41	55	30	14	3	1
8-SLR303-M12X110	0.53	0.5	1.0	M12X110	36	16.5	51	41	55	30	14	3	1
8-SLR303-M14	0.45	1.12	2.0	M14X30	36	16.5	51	41	55	30	14	3	1
8-SLR303-M16	0.46	1.12	2.0	M16X40	36	16.5	52	42	55	30	14	3	1
8-SLR303-M16X40	0.48	1.12	2.0	M16X100	36	16.5	52	42	55	30	14	3	1
8-SLR303-M16X100	0.34	1.12	2.0	M16X100	36	16.5	52	42	55	30	14	3	1
8-SLR303-M16X120	0.5	1.12	2.0	M16X120	36	16.5	52	42	55	30	14	3.5	1
8-SLR303-M20	0.96	2	4	M20X30	49.5	19	68	56	70	35	16	3.5	1
8-SLR303-M20X120	1.17	2	4	M20X120	49.5	19	68	56	70	35	16	3.5	1
8-SLR303-M24	1.45	3.15	6.3	M24X40	57	22	78	65.5	85	40	18	3.5	1.5
8-SLR303-M24X40	1.42	3.15	6.3	M24X90	57	22	78	65.5	85	40	18	3.5	1.5
8-SLR303-M24X90	1.66	3.15	6.3	M24X90	57	22	78	65.5	85	40	18	3.5	1.5
8-SLR303-M24X120	1.74	3.15	6.3	M24X120	57	22	78	65.5	85	40	18	3.5	1.5
8-SLR303-M27	1.47	3.15	6.3	M27X35	57	22	78	65.5	85	40	20	3.5	1.5
8-SLR303-M30(3T)	2.17	5.3	10.6	M30X35	66	23.5	96.5	80.5	85	40	20	4	1.5
8-SLR303-M30X38	2.18	5.3	10.6	M30X38	66	23.5	96.5	80.5	85	40	20	4	1.5
8-SLR303-M30X120	2.65	5.3	10.6	M30X120	66	23.5	96.5	80.5	85	40	22	4	1.5
8-SLR303-M36(9T)	3.77	8	11.8	M36X35	80	28	112	92	115	50	22	6	2
8-SLR303-M36X38	3.58	8	11.8	M36X38	80	28	112	92	115	50	22	6	2
8-SLR303-M36X120	4.01	8	11.8	M36X120	80	28	112	92	115	50	22	6	2
8-SLR303-M36X90	4.17	8	11.8	M36X90	80	27	109	89.5	115	50	22	6	2
8-SLR303-M36X100	6.41	8	11.8	M36X100	80	27	109	89.5	115	50	22	6	2
8-SLR303-M39	3.65	8	11.8	M39X50	80	27	109	89.5	115	50	22	6	2
8-SLR303-M39X90	3.71	8	11.8	M39X90	80	27	109	89.5	115	50	22	6	2
8-SLR303-M42	3.62	10	15	M42X50	80	27	109	89.5	115	50	25	6	2.5
8-SLR303-M42X60	3.72	10	15	M42X60	80	27	109	89.5	115	50	25	6	2.5
8-SLR303-M42X130	4.46	10	15	M42X130	80	27	109	89.5	115	50	25	6	2.5
8-SLR303-M42X180	5.0	10	15	M42X180	80	27	109	89.5	115	50	25	6	2.5
8-SLR303-M45X60	4.17	10	15	M45X60	80	27	109	89.5	115	50	25	6	2.5
8-SLR303-M48	4.02	10	15	M48X50	80	27	109	89.5	115	50	25	6	2.5
8-SLR303-M48X110	4.8	10	15	M48X110	80	27	109	89.5	115	50	25	6	2.5
8-SLR303-M56X84	11.6	15	25	M56X84	117	42	310	280	152	70	32	7	2.5
8-SLR303-M64X95	12.4	15	25	M64X95	117	42	310	280	152	70	32	7	2.5

Carga de ruptura es 4 veces la carga límite de trabajo

Marcas regulares: M20X30 WLL2T CE SLR-NUMERO DE LOTE

WLL 2T es carga límite de trabajo a 90°

ADVERTENCIA

Nunca exceda la carga límite de trabajo